


GRAY OPS FIREARMS SPECIALTY TRAINING, INC.

25 YARD - RIFLE ZEROING TARGET

RIFLE SER#: _____ SHOOTER: _____ DATE: _____

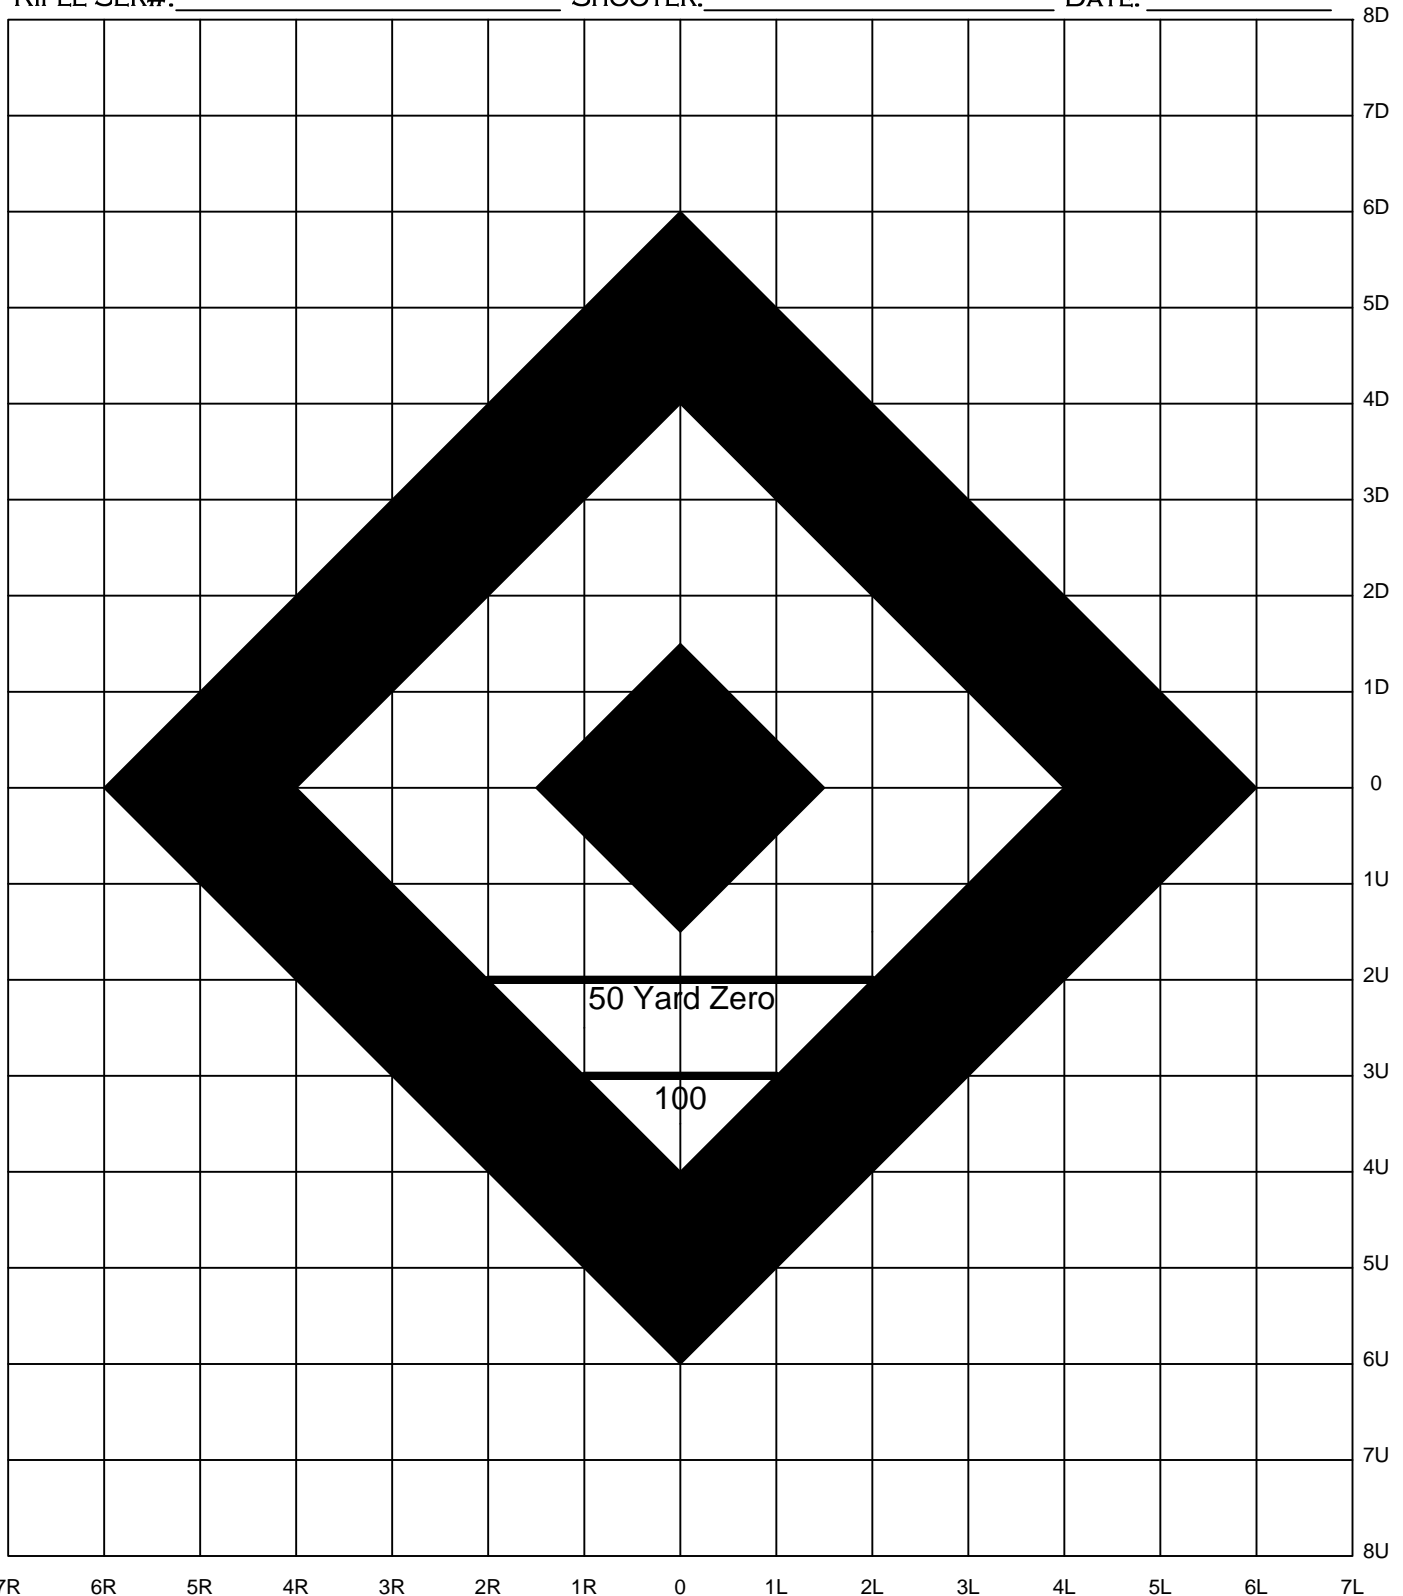

Adjustment Guide:

- A-1 Front (round) = 14.5 or 16 (1.5 moa or 3/8" @ 25' / 20" bbl = (1 moa @ 100' or 1/4" @ 25')
- A-1 Rear Knob = 14.5 or 16 (1.5 moa or 3/8" @ 25' / 20" bbl = (1 moa @ 100' or 1/4" @ 25')
- A-2 Front (square) = 14.5 or 16 (2 moa or 1/2" @ 25' / 20" bbl = (1.5 moa @ 100' or 3/8" @ 25')
- A-3 Rear Knob = 14.5 or 16 (.75 moa or 3/16" @ 25' / 20" bbl = (.5 moa @ 100' or 1/8" @ 25')
- A2 6/3 sights lower to the 6/3 setting on 14.5/16" (Z on 20") 8/3 sights lower the rear return to 1 click past 300m
- Aimpoint/Eotech = 1/2 moa (1/2" @ 100 / 1/4" @ 50) / Eotech 1 full rotation = 10 moa (5" @ 50' / 10" @ 100')
- Magpul MBUS = (14.5 sight distance) Front 2 moa or 1/2" @ 25 / Rear .75 moa or 3/16" @ 25